

Halo Mirror

M001A • Halo Ø600 mm

M001B • Halo Ø700 mm

M001C • Halo Ø800 mm

M001D • Halo Ø900 mm

M001E • Halo Ø1000 mm


Product highlights

- Slim mirror design with circular **INJECTED LIGHT FRAME** with constant quality assurance
- The light is sent both forward and backward
- High light quality with a CRI >90
- Touch field for controlling light
- Hidden LED diodes emit light softly



Specifications

LED type	3000K / CCT 2700-6500K
Volt (Vac)	220-240V~, 50/60Hz
Wattage (total)	18W /21W /24W /29W /31W
IP class	IP44
CRI	>90
Lumen	1500/1800 /2250/2400/2600
Energy class	E
Safetyfilm	Yes
Height (mm)	Ø600/Ø700/Ø800/Ø900/Ø1000
Width (mm)	-
Depth (mm)	27
Glassthickness (mm)	5
Material	Glass
Color / Finish	Mirror
Input cable length (m)	1.5
Connection	Terminal
Mounting brackets	Included
Dimmer function	Touch control

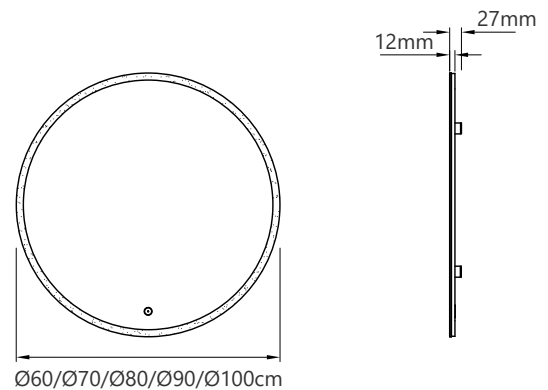

Safety

Safety Class	Class II (double insulated)
CE (LVD+EMC)	yes
UKCA	yes
Rohs	yes
Reach	yes