

# G Mirror

M012A • G Mirror 600x650 mm  
M012C • G Mirror 900x650 mm

M012B • G Mirror 800x650 mm  
M012D • G Mirror 1200x650 mm


## PRODUCT HIGHLIGHTS

- Slim mirror design with a full **Extruded dual-color Lightbox**  
Perfect design compromising between quality and cost
- The light is sent both forward and sideward
- High light quality with a CRI >90
- Detachable Lightbox in IP44
- Hidden LED diodes emit light softly
- Installed horizontally or vertically



## Specifications

|                        |                              |
|------------------------|------------------------------|
| LED type               | 3000K / CCT 2700-6500K       |
| Volt (Vac)             | 220-240V~, 50/60Hz           |
| Wattage (total)        | 15W                          |
| IP class               | IP44                         |
| CRI                    | >90                          |
| Lumen(light source)    | 1500                         |
| Energy class           | D                            |
| Safetyfilm             | Yes                          |
| Height (mm)            | 800                          |
| Width (mm)             | 650                          |
| Depth (mm)             | 30                           |
| Glassthickness (mm)    | 5                            |
| Material               | Glass                        |
| Color / Finish         | Mirror                       |
| Input cable length (m) | 1.5                          |
| Connection             | Terminal                     |
| Mounting brackets      | Included                     |
| Dimmer function        | N/A (Touch control Optional) |

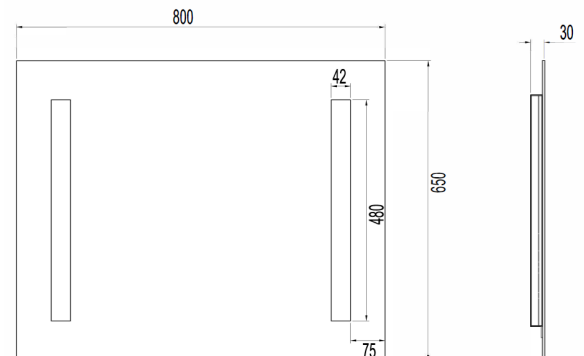

## Safety

|              |                             |
|--------------|-----------------------------|
| Safety Class | Class II (double insulated) |
| CE (LVD+EMC) | yes                         |
| UKCA         | yes                         |
| Rohs         | yes                         |
| Reach        | yes                         |